




# Grace Alloy Corp.

Stainless Steel Coil, Strip,  
Sheet, Plate, and Thick Plate  
Product Catalog

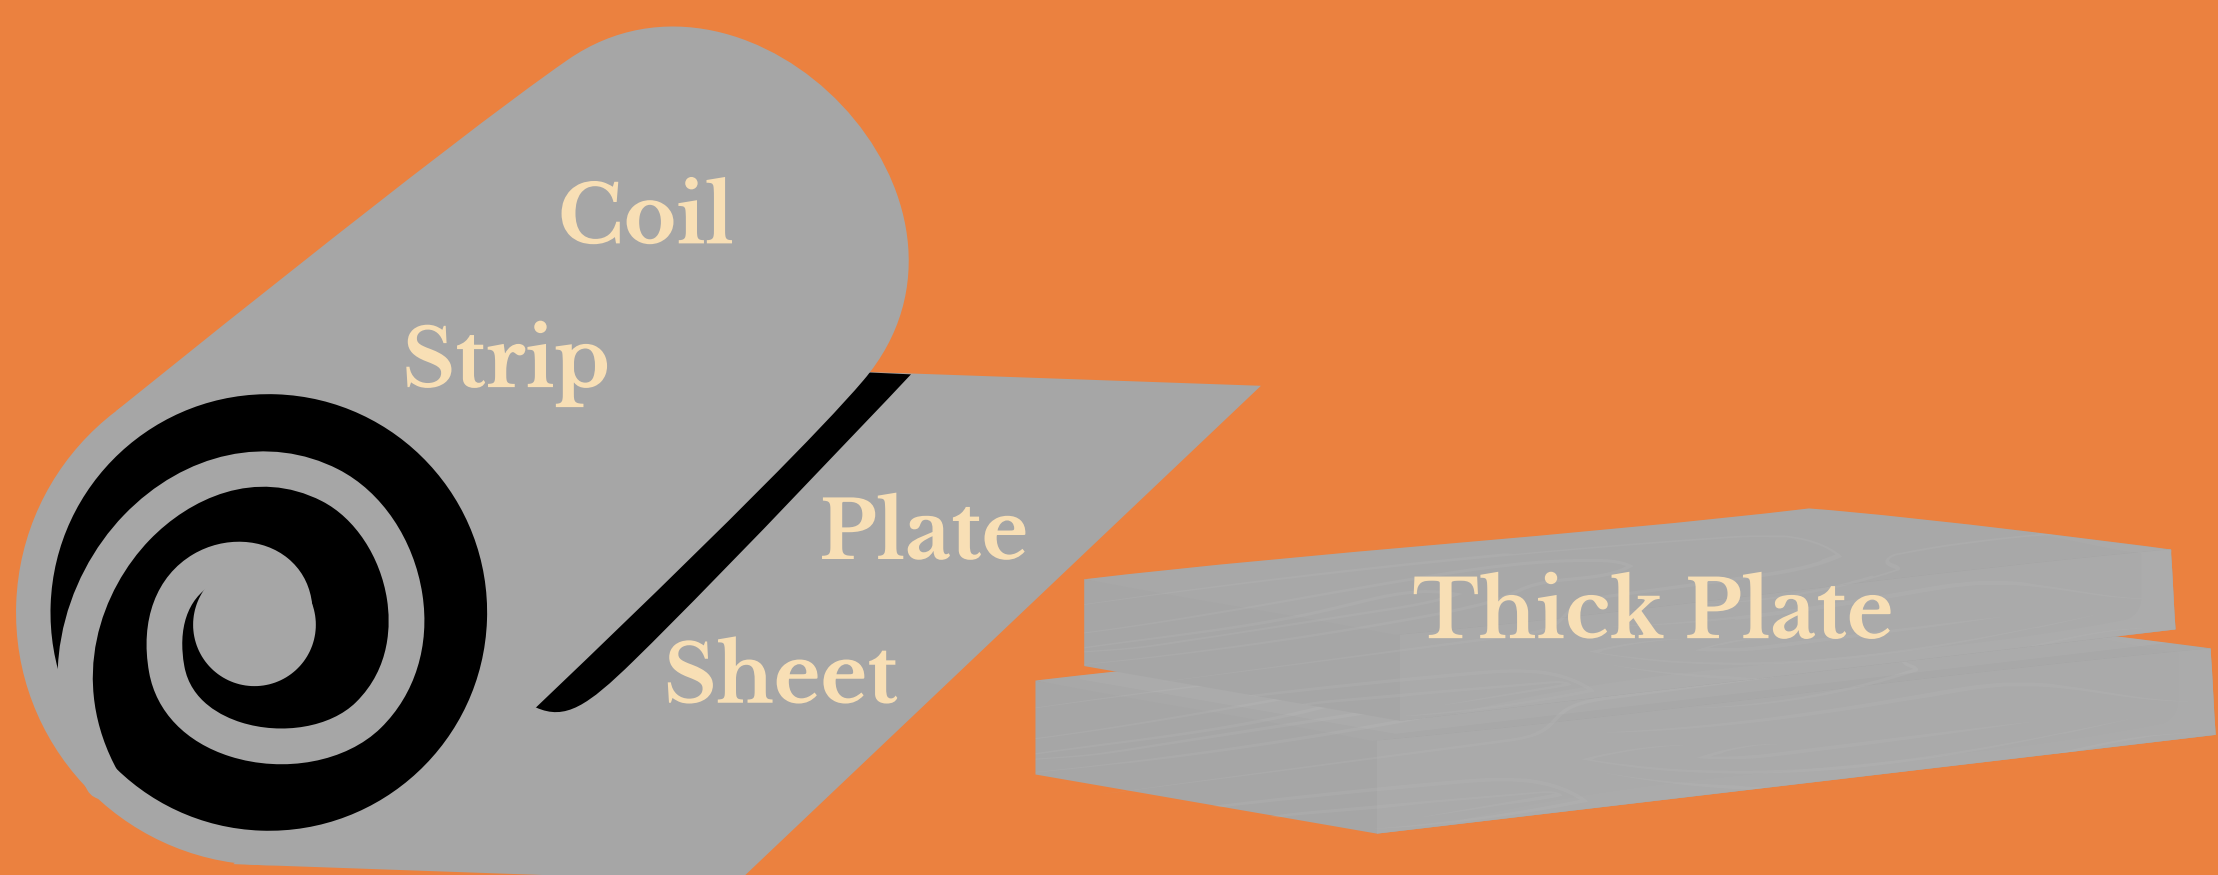

9F. No. 148, Zhongzheng 4th Road,  
Qianjin District, Kaohsiung City,  
Taiwan (801)

Tel: +886-7-2851-999

Fax: +886-7-2857-666

Office Hours (Taiwan Time):


Mon - Fri 9:00 - 17:30

Email: [grace@gracealloy.com.tw](mailto:grace@gracealloy.com.tw)

[gracealloycorp@gmail.com](mailto:gracealloycorp@gmail.com)

Web: [www.gracealloy.com.tw](http://www.gracealloy.com.tw)

GA strives for your optimum

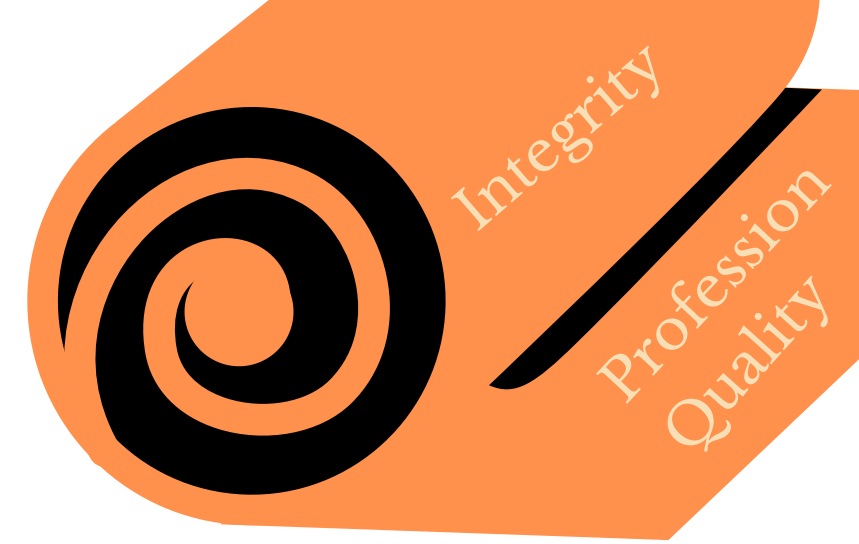

# Contents

About Us .....	1
Product Range .....	2
Stainless Steel Sheet and Plate .....	3
Stainless Steel Thick Plate .....	4
Stainless Steel Coil and Strip .....	5
Tolerance .....	6
Gauge Conversion .....	7



# About Us

**Grace Alloy Corp.** is a trading company. Our team has accumulated more than three decades of extensive experience in stainless steel, carbon steel, aluminum, copper alloy, and other non-ferrous materials. We specialize in supplying and purchasing materials in the forms of but not limited to:

- Coils
- Strips
- Precision strips (CSP)
- Sheets
- Plates
- Checkered Plates
- Thick Plates
- Pipes
- Fittings
- Tubes (round/square/rectangular)
- Wire rods
- Gratings
- Bars (flat/angle/round/square/hexagon)
- Water tanks
- Laser-cutting machines
- Welding machines
- Shearing machines
- Leveling machines

Our sources abide by international specifications. We strive to put every product to its optimal use and provide our valuable customers with a one-stop and personalized purchasing experience. Our supplies are used in various industries, including construction, transportation, public infrastructure, home appliances, interior design, commercial kitchenware, automobiles, electronics, food service, etc.

The earnest teamwork, rigorous profession, respected market reputation, and solid trust have developed firm networks worldwide. Networking with various suppliers allows us to provide favorable pricing, shorter delivery time, more amicable minimum order quantity (MOQ), diverse country of origin, and integrated services for our customers.

The collaborations that encompass both the domestic and international spheres are indicative of our competence, competitiveness, and confidence in rendering genuine services along with prime quality to our clients.

Maintaining a long-term, stable, smooth, and satisfying cooperative relationship with customers and suppliers serves as our topmost priority. The prospective aim of Grace Alloy Corp. is to forge cohesion that facilitates a mutually beneficial platform for each party included.

## Product Range

Material Grades: 201, 302, 304, 304L, 304/304L, 304H, 304N, 316, 316L, 316/316L, 316Ti, 321, 321H, 309, 310, 310S, 317, 317L, 409L, 410S, 430, 439, 441, 443, 904L, 2205, 2507, and many more.

### Stainless Steel Sheet/ Plate

#### Stainless Steel Hot Rolled Plate

Surface: : **No.1**

Thickness: **3.0mm - 100.0mm**

Width: **Mill Edge: 1220 - 1570mm**

**Slit Edge: 914mm, 1000mm, 1219mm, 1500mm, 1524mm**

Length: **2000mm - 6000mm or up to request**

#### Stainless Steel Cold Rolled Sheet

Surface: : **2B, BA, No.4, scotch brite, hair line, mirror (8K), non-direction, star light, bead-blasted, etched, 2D, 3D, etc.**

Thickness: **0.3mm - 6.0mm**

Width: **Mill Edge: 1220 - 1570mm**

**Slit Edge: 914mm, 1000mm, 1219mm, 1500mm, 1524mm**

Length: **2000mm - 6000mm or up to request**

### Stainless Steel Coil

#### Stainless Steel Hot Rolled Coil

Surface: : **No.1**

Thickness: **3.0mm - 8.0mm**

Width: **Mill Edge: 1220 - 1570mm**

**Slit Edge: 914mm, 1000mm, 1219mm, 1500mm, 1524mm**

#### Stainless Steel Cold Rolled Coil

Surface: : **2B, BA, No.4, scotch brite, hair line, mirror (8K), non-direction, star light, bead-blasted, etched, 2D, 3D, etc.**

Thickness: **0.3mm - 6.0mm**

Width: **Mill Edge: 1220 - 1570mm**


**Slit Edge: 914mm, 1000mm, 1219mm, 1500mm, 1524mm**

### Stainless Steel Strip

Surface: : **No.1/ 2B: 180G, 240G, 320G, 400G. 600G, etc.**

Thickness: **0.3mm - 6.0mm**

Width: **25mm - 710mm**



## Stainless Steel Sheet and Plate

ASTM A240/A480, JIS G4304/G4305, DIN 17440/ DIN 17441, GB/T 3208/ 4237/ 24511, etc.

Stainless Steel Sheet and Plate										
Item (mm)	< 1000 x L		1000 x 2000		1219 x 2438		1500 x 3000		2000 x 6000	
Thickness (mm)	2B	No.1	2B	No.1	2B	No.1	2B	No.1	2B	No.1
0.4	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
0.5	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
0.6	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
0.7	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
0.8	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
0.9	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
1.0	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
1.2	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
1.5	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
2.0	★ / ▲		★ / ▲		★ / ▲		★ / ▲			
2.5					★ / ▲		★ / ▲			
3.0					★ / ▲		★ / ▲			
4.0										
5.0										
6.0										
8.0										
10.0										
12.0										
14.0										
16.0										

1. Material Grade: 201, 302, 304, 304L, 316, 316L, 310S, 409, 439, 430, 443, 2205, and many more.
2. Width (mm): 1000, 1219, 1500, 1524, 2000, and other sizes up to requests.
3. Length (mm): 2000, 2438, 3000, 3048, 6000, 6096, and other sizes up to requests.
4. Surface Finish: 2B, BA, No. 1, No. 3, No. 4, HL, ND, and other finishes up to requests.
5. Polish: ★ Oil Wet Polish ▲ Dry Polish, both-side polished available
6. Film: Paper interleaf, PE, PVC, laser cutting film, or other protective films up to requests.
7. Weight: Sheet: 1-2mts; Plate: 2-4mts.

## Stainless Steel Thick Plate

ASTM and EN Specifications


Stainless Steel Thick Plate	
Thickness (mm)	
3.0 - 100.0mm	
Material Grade	<p><b>ASTM</b></p> <p>304, 304L, 304/304L, 304H, 304N, 316, 316L, 316Ti, 321, 321H, 310, 310S, 409L, 410S, 430, 439, 441, 904L, 2205, 2507, 317, 317L, and many more.</p> <p><b>EN</b></p> <p>1.4301, 1.4307, 1.4301/1.4307, 1.4401, 1.4404, 1.4950, 1.4951, 1.4541, and many more</p>
Width (mm)	1000 - 4000mm and other sizes up to requests.
Length (mm)	2000, 2438, 3000, 3048, 6000, 6096, and other sizes up to requests.
Surface Finish	No.1

## Stainless Steel Coil and Strip

ASTM A240/A480, JIS G4304/G4305, DIN 17440/ DIN 17441, GB/T 3208/ 4237/ 24511, etc.

Stainless Steel Coil and Strip										
Width (mm)	< 1000		1000		1219		1500		2000	
Thickness (mm)	2B	No.1	2B	No.1	2B	No.1	2B	No.1	2B	No.1
0.4	★		★		★		★			
0.5	★		★		★		★			
0.6	★		★		★		★			
0.7	★		★		★		★			
0.8	★		★		★		★			
0.9	★		★		★		★			
1.0	★		★		★		★			
1.2	★		★		★		★			
1.5	★		★		★		★			
2.0	★		★		★		★			
2.5					★					
3.0					★					
4.0										
5.0										
6.0										
8.0										
10.0										
12.0										
14.0										
16.0										

1. Material Grade: 201, 302, 304, 304L, 316, 316L, 310S, 409, 439, 430, 443, 2205, and many more.
2. Width (mm): 1000, 1219, 1500, 2000, and other sizes up to requests.
3. Length (mm): Up to requests.
4. Surface Finish: 2B, BA, No. 1, No. 3, No. 4, HL, and other finishes up to requests.
5. Polish: ★ Oil Wet Polish, both-side polished available.
6. Film: Paper interleaf, PE, PVC, laser cutting film, or other protective films up to requests.
7. Inside Diameter of Coil/Strip: 508mm, 610mm.
8. Weight: Cold rolled: 1-24mts; hot rolled: 2-25mts.



## Stainless Steel Hot Rolled Plate Tolerance

Item	Width Tolerance (mm)			Length Tolerance (mm)				
Standards								
ASTM A480	W < 1200	+2.0	-0.0	L < 3000	+12.0	-0.0		
	W ≥ 1200	+6.0	-0.0	L ≥ 3000 ~ ≤ 6000	+0.025*L	-0.0		
JIS G4304	W < 2000	L ≤ 3500	+15.0	-0.0	L ≤ 3500	+10.0	-0.0	
		L > 3500 ~ 6000	+15.0	-0.0	L > 3500 ~ 6000	+15.0	-0.0	
		L > 6000	+20.0	-0.0	L > 6000	+30.0	-0.0	
	W ≥ 2000	L ≤ 3500	+5.0	-0.0	L ≤ 3500	+15.0	-0.0	
		L > 3500 ~ 6000	+15.0	-0.0	L > 3500 ~ 6000	+20.0	-0.0	
	L > 6000	+20.0	-0.0	L > 6000	+35.0	-0.0		
GB/T 24511	600 ≤ W ≤ 2100			L ≤ 2000 ~ ≤ 12000			+0.005*L	-0.0
GB/T 4237	600 ≤ W ≤ 2100			L < 2000			+10.0	-0.0
				L ≥ 2000 ~ < 20000			+0.005*L	-0.0
W: Nominal Width (mm)		L: Nominal Length (mm)			T: Nominal Thickness (mm)			

## Stainless Steel Cold Rolled Plate Tolerance

Item	Width Tolerance (mm)			Length Tolerance (mm)			
Standards							
ASTM A480	600 < W ≤ 1000	+1.5	-0.0	L < 2000	+15.0	-0.0	
	1000 < W ≤ 2100	+2.0	-0.0	L ≥ 2000 ~ ≤ 6000	+0.025*L	-0.0	
JIS G4304	W > 1524	+5.0	-0.0	L ≤ 3500	+10.0	-0.0	
	W ≤ 1524	+10.0	-0.0	L > 3500 ~ 6000	+15.0	-0.0	
				L > 6000	+30.0	-0.0	
GB/T 24511	T > 1.5 ~ 2.5	+2.0	-0.0	L ≤ 2000 ~ ≤ 10000	+0.005*L	-0.0	
	T > 2.5 ~ 3.5	+3.0	-0.0				
	T > 3.5 ~ 8.0	+4.0	-0.0				
GB/T 3280	600 ≤ W < 1000	T < 1.5	+1.5	-0.0	L ≤ 2000	+5.0	-0.0
		T ≥ 1.5 ~ < 2.5	+2.0	-0.0			
		T ≥ 2.5 ~ < 3.5	+3.0	-0.0			
		T ≥ 3.5 ~ < 8.0	+4.0	-0.0			
	W > 1000	T < 1.5	+2.0	-0.0	L > 2000	+0.0025*L	-0.0
		T ≥ 1.5 ~ < 2.5	+2.0	-0.0			
		T ≥ 2.5 ~ < 3.5	+3.0	-0.0			
		T ≥ 3.5 ~ < 8.0	+4.0	-0.0			
W: Nominal Width (mm)		L: Nominal Length (mm)			T: Nominal Thickness (mm)		

\*Thickness tolerance is for reference only. The actual tolerance is subject to final confirmation in the quotation form.




## Gauge Conversion

Gauge & Inch	Converted into mm
28GA	0.40
26GA	0.50
24GA	0.60
22GA	0.80
20GA	1.0
18GA	1.2
16GA	1.6
14GA	2.0
12GA	2.8
11GA	3.0
10GA	3.5
8GA	4.0
7GA	5.0
3/16"	5.0
1/4"	6.0
5/16"	7.5
3/8"	9.5
1/2"	13.0
5/8"	16.0
3/4"	19.0
1"	25.0

\*The above table is for reference only.

# Grace Alloy Corp.

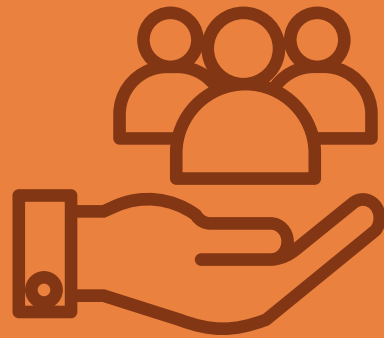

Office Hours: Mon - Fri 9:00 - 17:30



[grace@gracealloy.com.tw](mailto:grace@gracealloy.com.tw)  
[gracealloycorp@gmail.com](mailto:gracealloycorp@gmail.com)



[www.gracealloy.com.tw](http://www.gracealloy.com.tw)



9F. No. 148, Zhongzheng 4th Road,  
Qianjin District, Kaohsiung City,  
Taiwan (801)

高雄市前金區中正四路148號9樓



Tel: +886-7-2851-999



Fax: +886-7-2857-666

GA strives for your optimum